

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T2S R1W

LINE	BEARING	DISTANCE
L1	S 42°02'54" W	58.82'
L2	N 66°43'18" W	43.87'
L3	N 55°45'51" W	41.65'
L4	N 38°58'07" E	20.67'


SEC 21	SEC 22
SEC 28	SEC 27

U.S.B.&M.

J-13



SCALE: 1"=30'

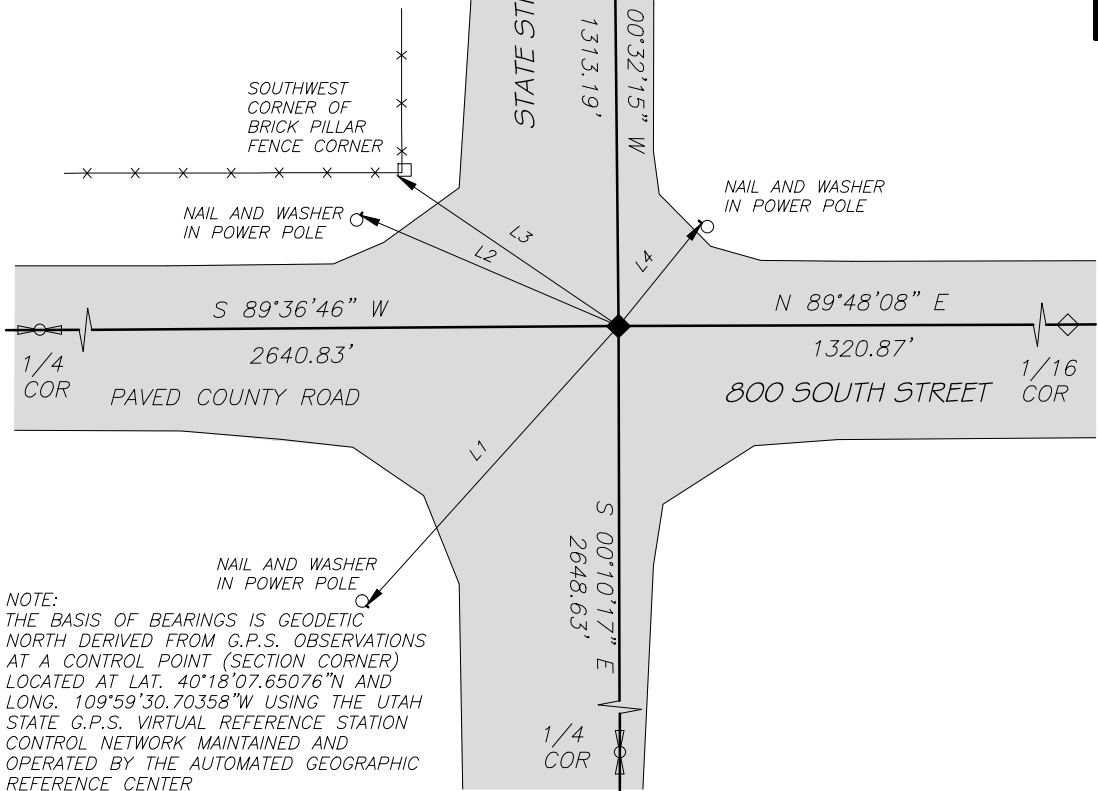


NOTE:
THE BASIS OF BEARINGS IS GEODETIC
NORTH DERIVED FROM G.P.S. OBSERVATIONS
AT A CONTROL POINT (SECTION CORNER)
LOCATED AT LAT. 40°18'07.65076"N AND
LONG. 109°59'30.70358"W USING THE UTAH
STATE G.P.S. VIRTUAL REFERENCE STATION
CONTROL NETWORK MAINTAINED AND
OPERATED BY THE AUTOMATED GEOGRAPHIC
REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A SURVEY MARKER AND
WASHER AT POSITION OF SECTION
CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

SET A DUCHESNE COUNTY 2½" DIA.
BRASS CAP ON 5/8" X 24" REBAR
IN CONCRETE COLUMN AT POSITION
OF SECTION CORNER

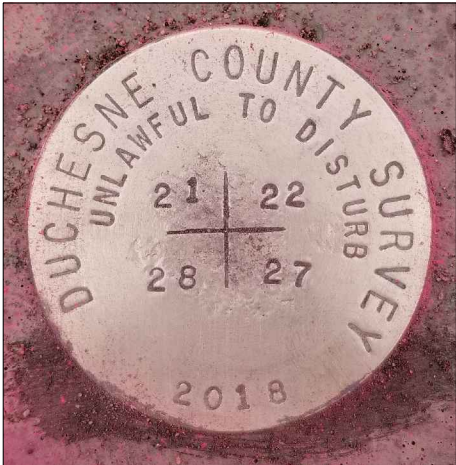

MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7277055.962
E: 2061145.671
NAVD88 EL: 5031.18'

LATITUDE: 40°17'15.58309" N
LONGITUDE: 109°59'30.28627" W
ELLIPSOID HEIGHT: 4973.81'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300020S0010W0_400300



PHOTO OF MONUMENT FACING NORTHWEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 11 DEC '17

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

